




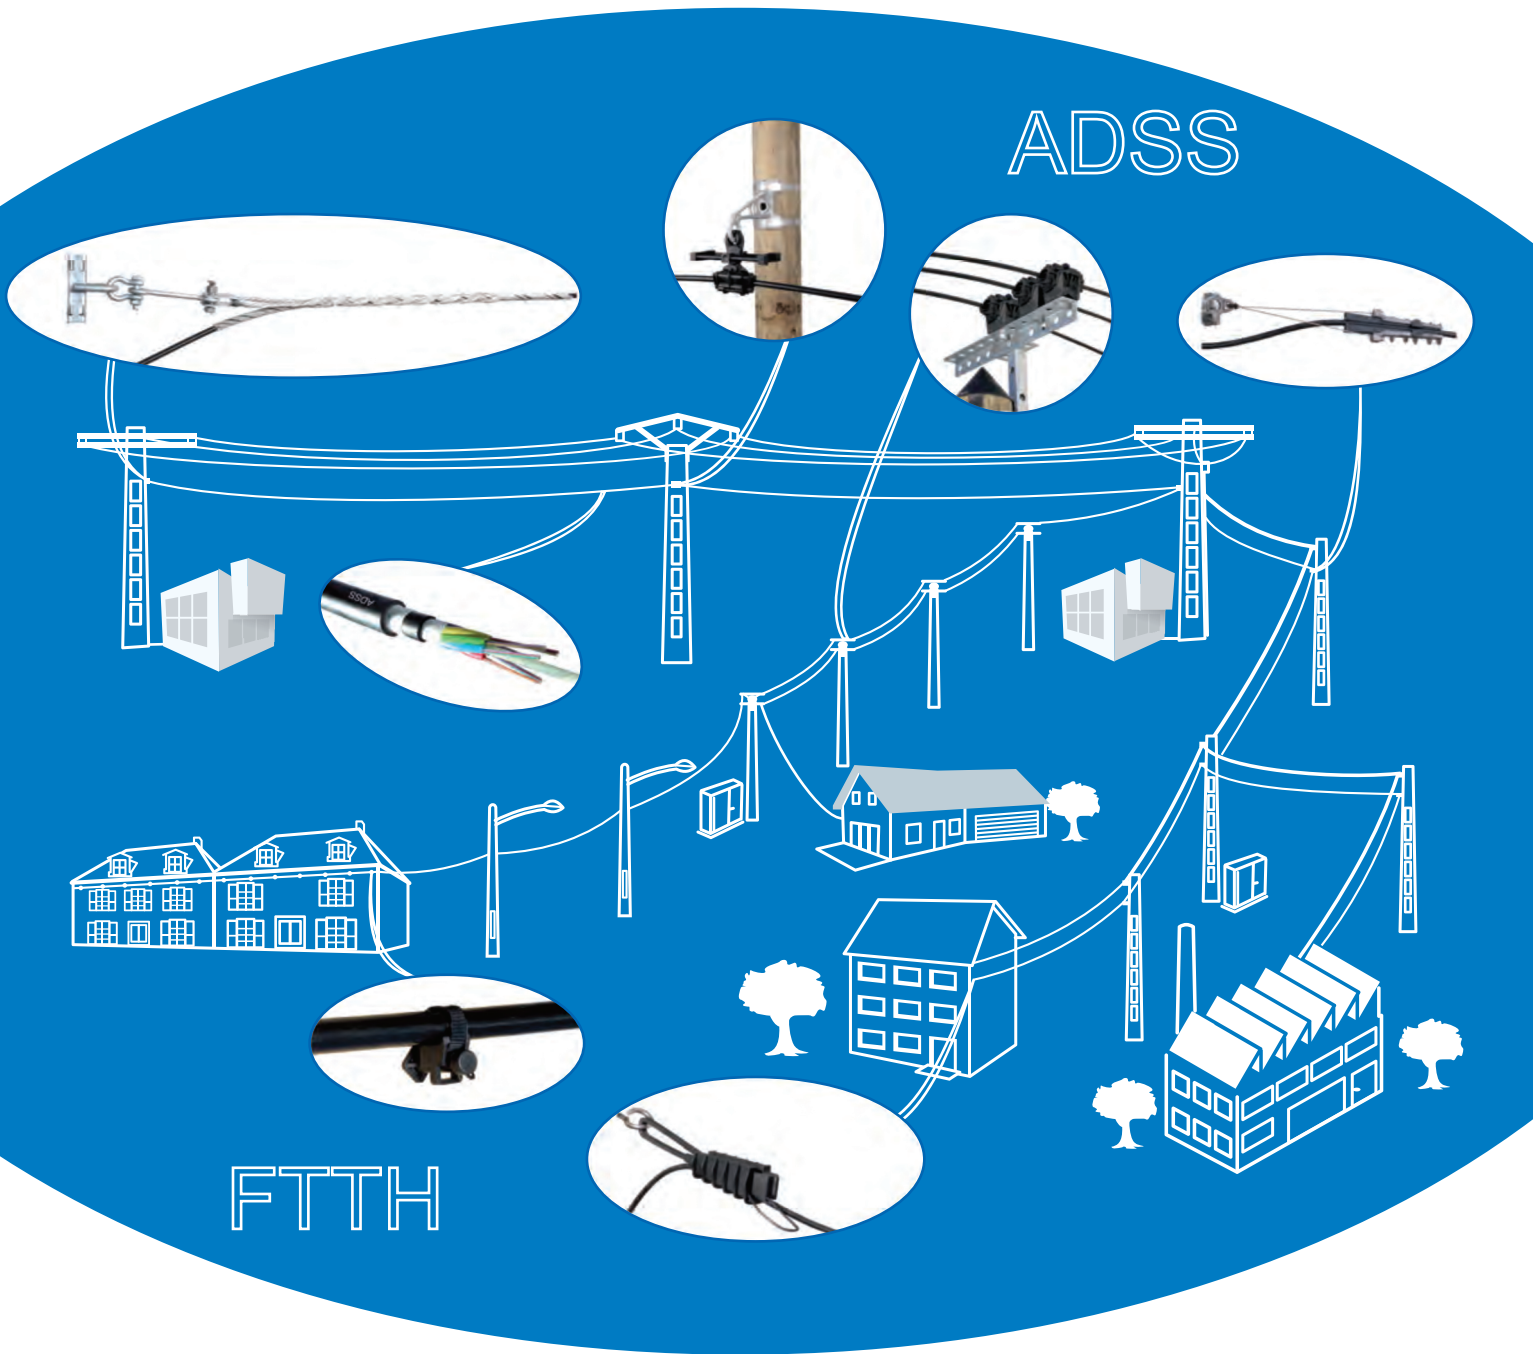

Accessories for Aerial Optical Fibre Network

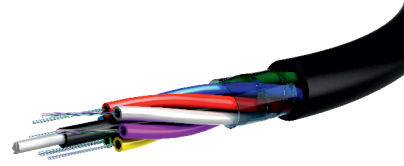

Accessories for ADSS and FTTH Aerial Cables

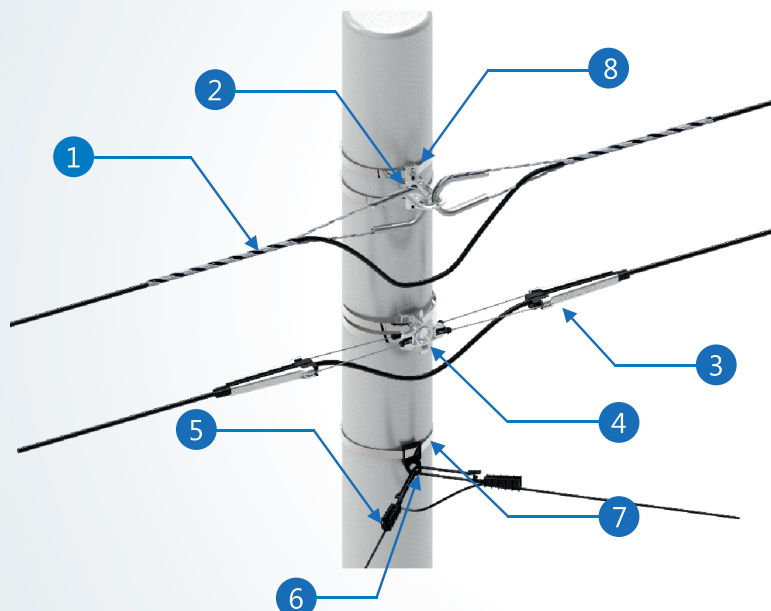


Tension Pole with Accessories


- 1 Anchoring Clamp - AS FO TC
- 2 Universal Pole Bracket - CA 10 TC
- 3 Anchoring Clamp - PA FO 500
- 4 Pole Bracket - CASH T
- 5 Anchoring Clamp - PAB FO 160 D 4 7
- 6 Pole Bracket - PA 69 F
- 7 SS Strap & Buckle - IF 107 & CHA 10
- 8 SS Strap & Buckle - IF 207 & CF 20

Multi Run Tension Pole with Accessories

- 1 Cross arm Bracket - MALICROSS
- 2 Anchoring Clamp - PA FO 750
- 3 Anchoring Clamp - PA FO 200

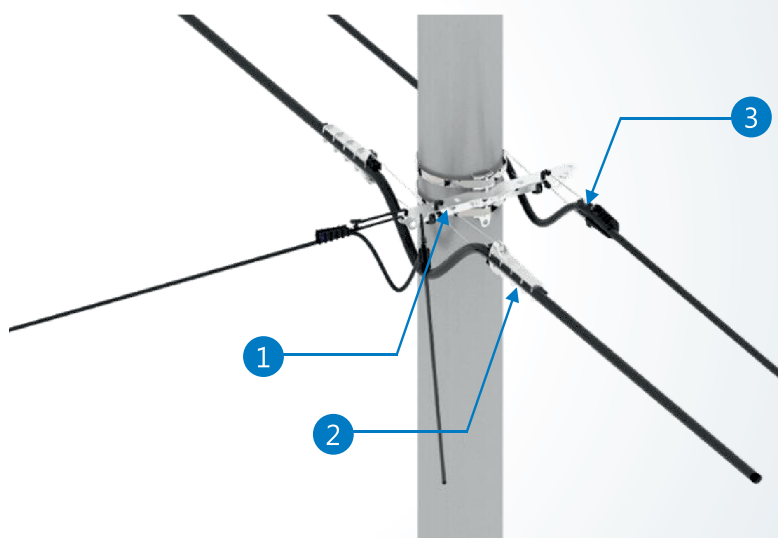

Accessories for ADSS and FTTH Aerial Cables

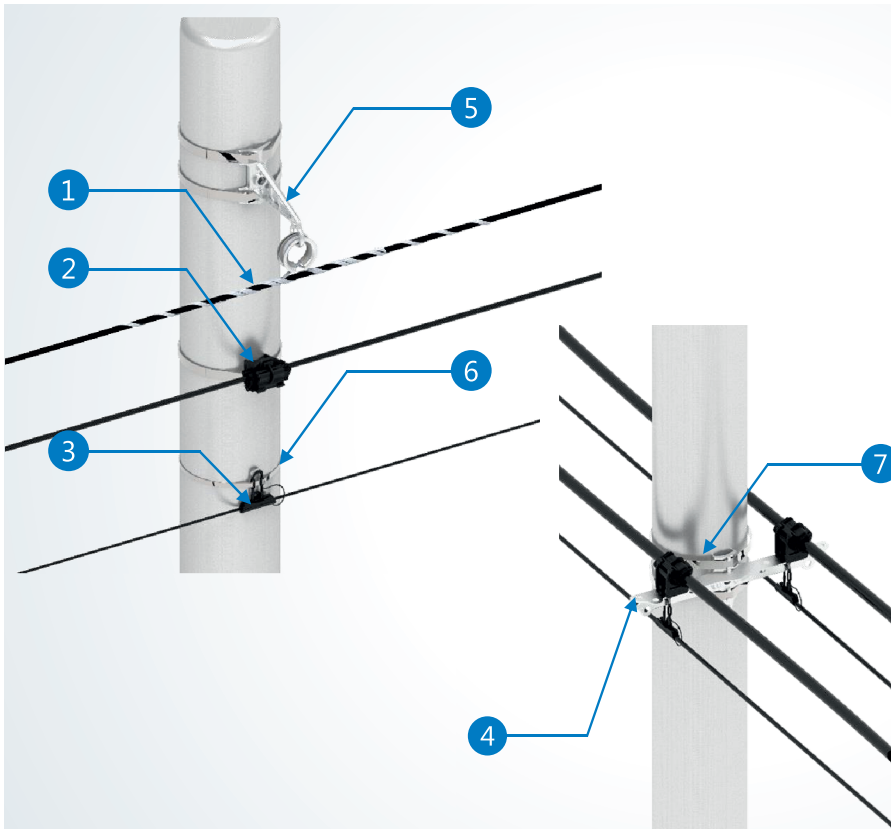


Suspension Pole with Accessories


- 1 Suspension Clamp - SS FO TC
- 2 Suspension Clamp - PSR 8 20 ADSS
- 3 Suspension Clamp - PSB FO D 5 8
- 4 Cross arm Bracket - MALICROSS
- 5 Suspension Bracket - CS 160
- 6 SS Strap & Buckle - IF 107 & CHA 10
- 7 SS Strap & Buckle - IF 207 & CF 20

Wall Mounting Accessories

- 1 Anchoring Bolt - BQC 12 CH
- 2 Anchoring Clamp - PA FO 500

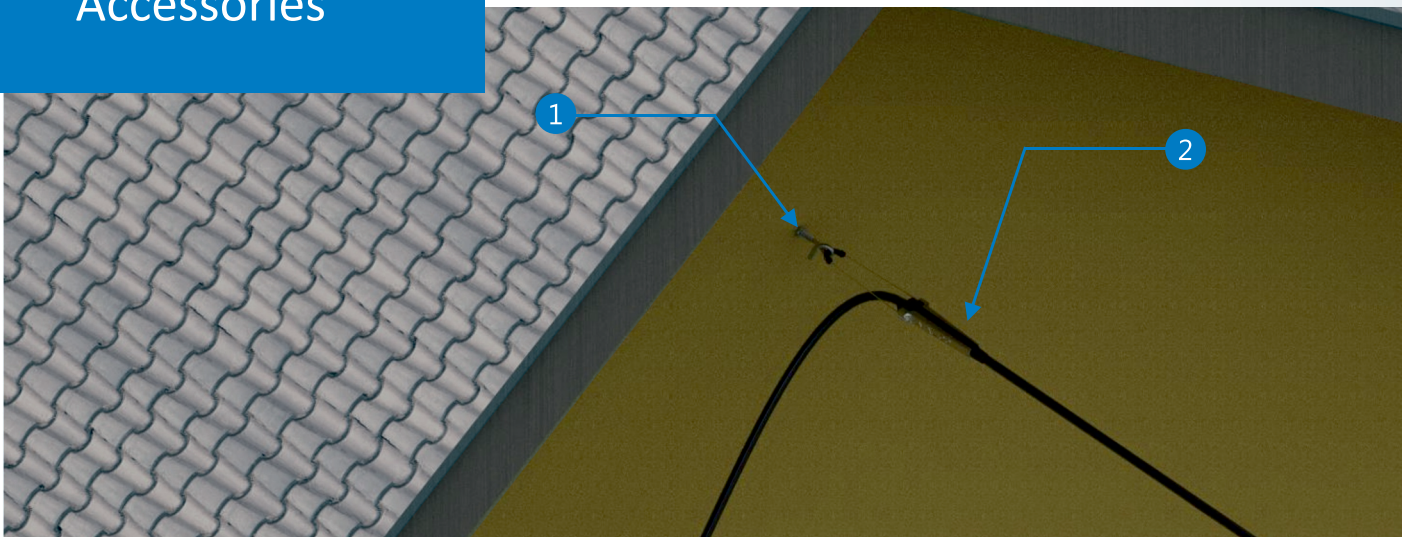


Accessories for ADSS and FTTH Aerial Cables

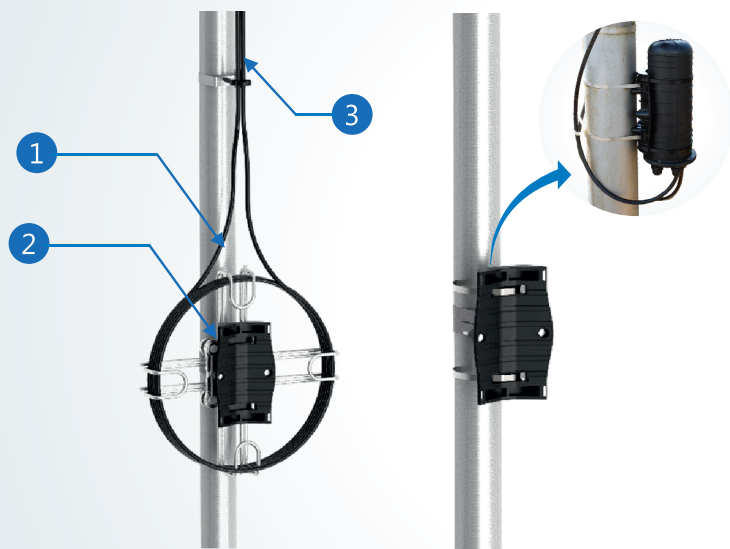

Cable Storage and Joint Closure Accessories

- 1 Adjustable Cable Storage Bracket - [MALICOIL](#)
- 2 Joint Closure Bracket - [JCB](#)
- 3 Downlead Clamp - [BIC](#)



DEAD END CLAMP (WEDGE TYPE)



SUSPENSION CLAMP (WEDGE TYPE)



ADJUSTABLE CABLE STORAGE BRACKET



DEAD END CLAMP (HELIX TYPE)



SUSPENSION CLAMP (HELIX TYPE)




DEAD END CLAMP (FTTX)



SUSPENSION CLAMP (FTTX)



JOINT CLSOURE BRACKET



SS STRAP & BUCKLE

Different dimensions of clamps are proposed in our telecom catalog.
To validate the compatibility of the clamp with your cable, please consult us.

Accessories for ADSS and FTTH Aerial Cables



Optical Termination Box (OTB XST/YST P)

Variant

OTB with splice tray

- 1 OTB WST 1SC P - OTB + 1 SC/APC Adaptor + Pigtailed
- 2 OTB WST 2SC P - OTB + 2 SC/APC Adaptor + Pigtailed
- 3 OTB WST 4SC P - OTB + 4 SC/APC Adaptor + Pigtailed


OTB without splice tray

- 1 OTB WOST 1SC P - OTB + 1 SC/APC Adaptor + Pigtailed
- 2 OTB WOST 2SC P - OTB + 2 SC/APC Adaptor + Pigtailed

Features

- Simplified access to FO cable
- Indoor application
- Locking for safety of cable
- Splice tray with locking
- Integrated protection shutter
- Multiple cable entries
- Din rail and Wall mounting
- Material: ABS-PC

FDP Indoor/Outdoor FDP I/O XX

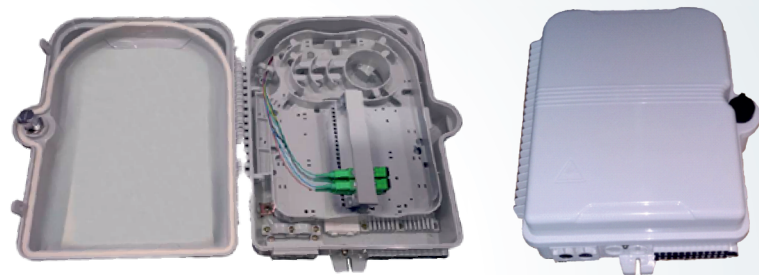

Applications

- 1 FTTH Deployments.
- 2 Optical CATV Networks
- 3 Passive Optical Networks (PON)
- 4 Telecom Networks
- 5 CATV Networks

Variant

- 1 FDP I/O 12
- 2 FDP I/O 24
- 3 FDP I/O 48

Features

- Wall mounting/pole mounting option
- Provision for locking the box
- IP 65 rated
- As per TEC/GR/TX/FTB-02/02/APR-2010 – Type – II
- Splice Capacity of 72F
- Material: High Quality Plastic

Accessories for ADSS and FTTH Aerial Cables



Joint Closure (JC M XXX)

Features

- Provides mechanical protection and environmental sealing to the spliced cables.
- Cable Entrances: 5 (4 Drop & 1 Express cable)
- Splice Capacity per tray: 24
- As per TEC/GR/TX/OJC- 002/03/APR-2010

Applications

- 1 Optical CATV Networks
- 2 Passive Optical Networks (PON)
- 3 Telecom Networks
- 4 CATV Networks

Variant

- 1 JC M 024
- 2 JC M 048
- 3 JC M 096
- 4 JC M 144

Shelter for FTTH Public Network



Features

- Modular metal construction
- Distribution and network distribution of optical fiber
- FTTH Public Network
- Conversion 400VAC/48VDC and back-up energy
- Forced ventilation enslaved 5-20m²

Applications

Telecom shelters, are designed for ground-mounted telecommunications and data equipment protection and are built to last a long time. These shelters are built to protect vital equipment including HVAC, generators, cable entry, fire suppression, lighting, racking, ladders and backup power systems.

Accessories for ADSS and FTTH Aerial Cables



SC/APC Adaptor

Specification

- 1 Alignment sleeve material: Zirconia Ceramic
- 2 Insertion Loss (IL): <0.1dB
- 3 Operating Temperature: -40°C to +75 °C

Features

- Simplex with flange
- Zirconia Ceramic Split Sleeve
- Colour Green
- TEC/GR/TX/OFJ-01/05/NOV-09

Optical Splitter (OS YxZ)


Type of Splitters	OS 1x2, OS 1x4, OS 1x8
Operating Wavelength	1260-1360 & 1480-1580nm
Fiber type	Single mode Fiber, G657A
Lead typed	900um, 1m to 1.5m length

Applications

- 1 FTTH Deployments.
- 2 Optical CATV Networks
- 3 Passive Optical Networks (PON)
- 4 Fibre Communication
- 5 Telecom, LANs

Features

- Tested for FTTH optical high power levels (Analogue Video Transmission)
- Compact packaging
- As per TEC GR No. TEC/GR/TX/OPT-001/01/ APRIL-12



Pigtail

Applications

- Insertion loss: IEC 61300-3-4
- Back Reflection: IEC 61300-3-6

Features

- Connector Type: SC/APC
- Connector Colour: Green
- Product Length: 1.5M Min
- Optical specification @ 1310nm/1550nm
IL values $\leq 0.2\text{dB}$, Return Loss $\geq 65\text{dB}$

Energy is our business



www.sicamegroup.com



SICAME INDIA
CONNECTORS PVT. LTD.

S.No. 473/1, Sirukundram Village,
Chengalpet District
Tamil Nadu - 603108, India

☎ +91 88709 30578, +91 88709 30576

✉ sales.telecom@sicame.in 🌐 www.sicame.in